


IN THE CLAIMS


1 (Currently Amended). A neutron shielding material composition comprising:
 a hydrogenated bisphenol resin;
 a refractory material having higher density than that of the hydrogenated bisphenol resin;
 a density-increasing agent having higher density than that of the refractory material;
 a curing agent component; and
 a boron compound,
 wherein said neutron shielding material composition maintains the density of a base resin comprising said curing agent component and the refractory material[[]]; and
wherein density of the neutron shielding material composition is from 1.62 g/cm³ to 1.72 g/cm³.

2 (Previously Presented). A neutron shielding material composition comprising a hydrogenated bisphenol epoxy represented by the following structural formula (1):

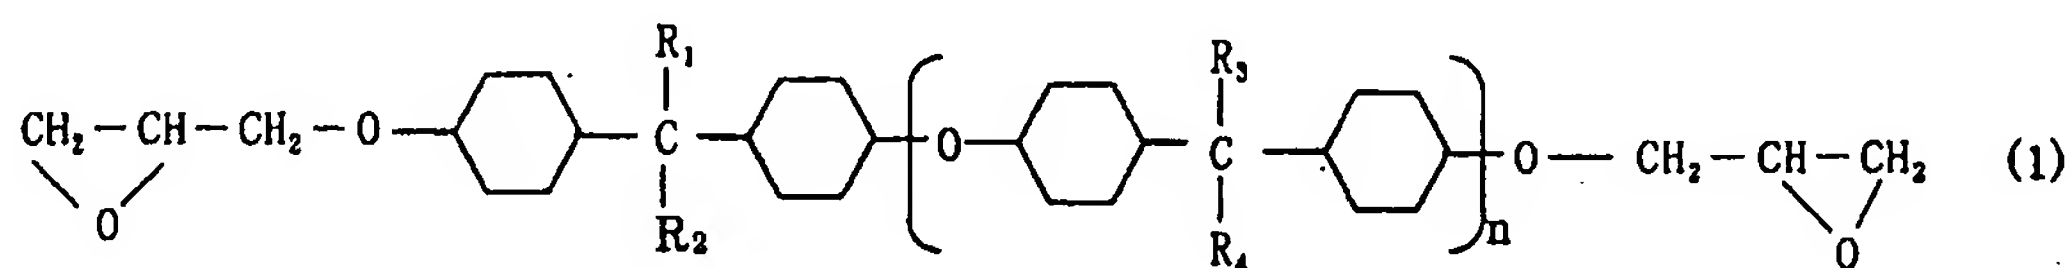


wherein each of R₁ to R₄ is independently selected from the group consisting of CH₃, H, F, Cl and Br, and n is from 0 to 2;
 a refractory material having higher density than that of the hydrogenated bisphenol resin;
 a curing agent component having at least one ring structure and a plurality of amino groups;
 a density-increasing agent having higher density than that of the refractory material; and
 a boron compound,
 wherein said neutron shielding material composition maintains the density of a base resin comprising said curing agent component and the refractory material.


3 (Previously Presented). The neutron shielding material composition according to claim 1, further comprising one or more compounds selected from the group consisting of a compound represented by the structural formulas (2), (3), (6) and (9):

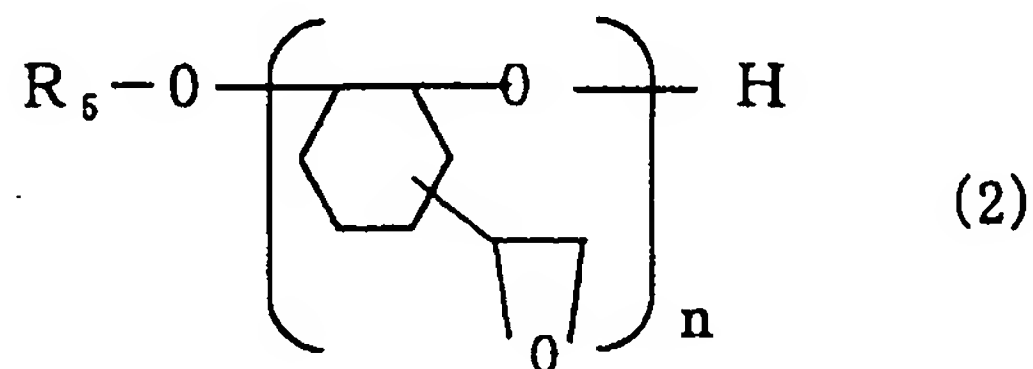


wherein R_5 is a C1-10 alkyl group or H, and n is from 1 to 24;

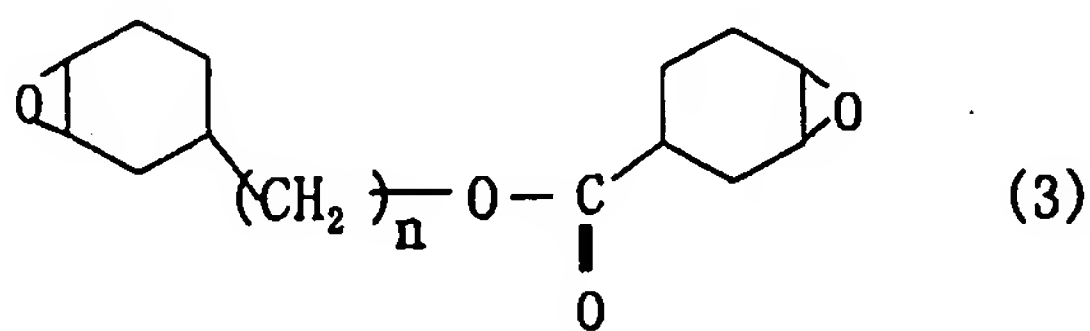


wherein n is from 1 to 8;

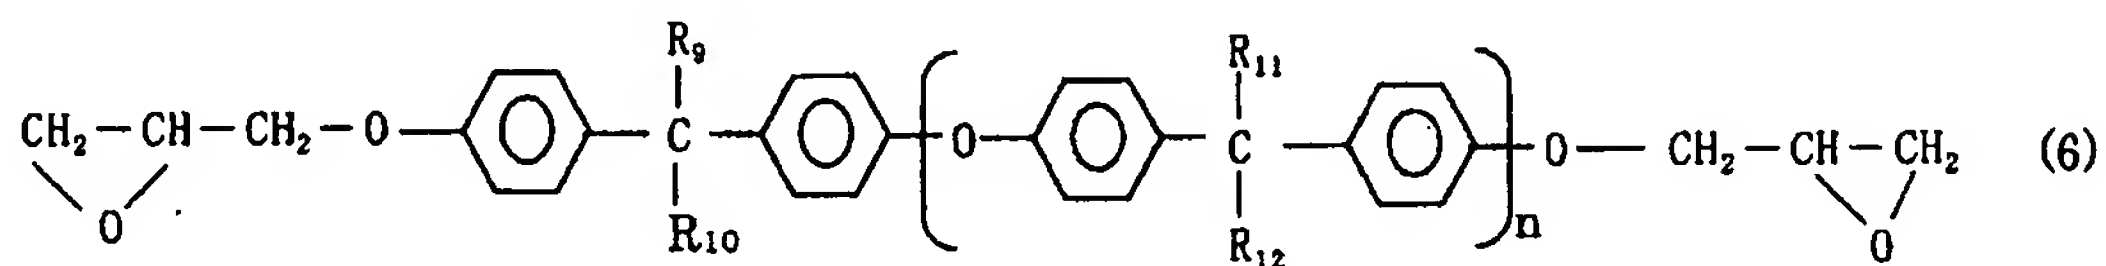



wherein each of R_9 to R_{12} is independently selected from the group consisting of CH_3 , H, F, Cl and Br, and n is from 0 to 2; and

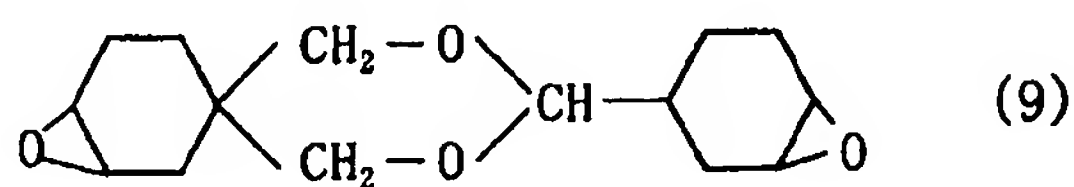

4 (Previously Presented). The neutron shielding material composition according to claim 1, comprising, as the curing agent component, a compound represented by the structural formula (4):

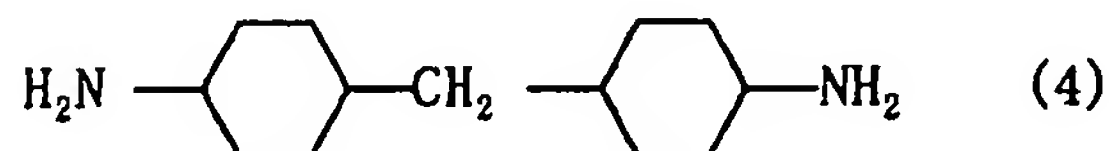

5 (Previously Presented). The neutron shielding material composition according to claim 1, wherein the curing agent component comprises one or more of compounds represented by the structural formulas (5) and (8):

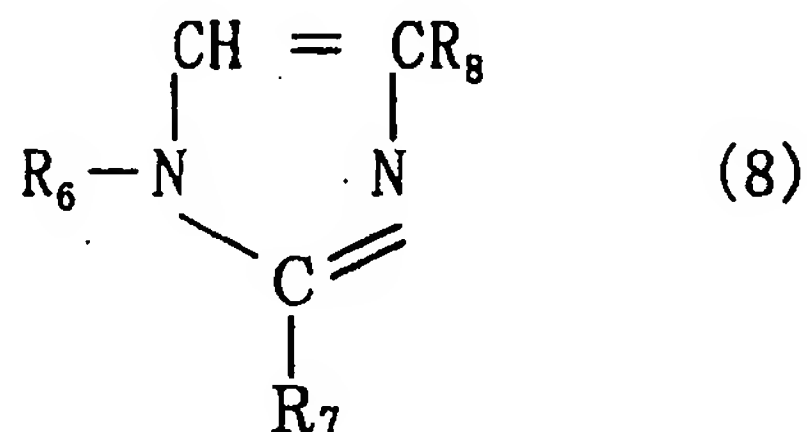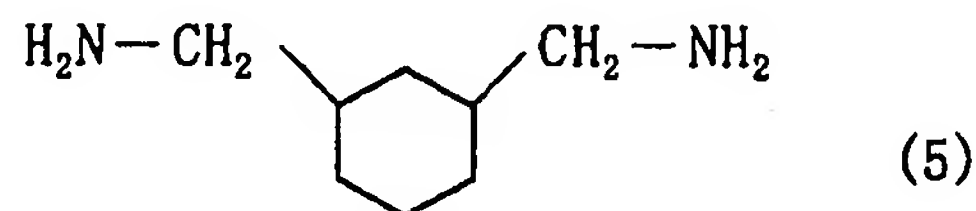

wherein R_6 , R_7 and R_8 each is independently a C1-18 alkyl group or H.

6 (Previously Presented). The neutron shielding material composition according to claim 1, further comprising a filler.

Claim 7 (Canceled).

8 (Previously Presented). The neutron shielding material composition according to claim 1, wherein the refractory material comprises at least one of magnesium hydroxide and aluminum hydroxide.

9 (Previously Presented). The neutron shielding material composition according to claim 1 or claim 2, wherein the density-increasing agent is a metal powder having a density of 5.0 to 22.5 g/cm³, a metal oxide powder having a density of 5.0 to 22.5 g/cm³, or a combination thereof.

10 (Previously Presented). A neutron shielding material obtainable from the neutron shielding material composition according to claim 1 or claim 2.

11 (Previously Presented). A neutron shielding container obtainable from the neutron shielding material composition according to claim 1 or claim 2.

Claim 12 (Canceled).

13 (Previously Presented). The neutron shielding material composition according to claim 8, wherein said magnesium hydroxide is obtained from sea water magnesium.